



ABC-CDS

COMBINED AIR INTAKE/EXHAUST AIR WALL HOOD
2020-05

Product brochure



ABC-CDS

AIR INTAKE/EXHAUST AIR



USE

Combined air intake/exhaust air wall hood for mounting into wall.

DESIGN

The exhaust air is evacuated horizontally via a circular wired mesh net on the front of the hood. The fresh air is taken in from a grille in the front. Reversible for right or left version by loosen the inserts alternatively it can be ordered for right or left version.

MAINTENANCE


Inspection of the product should be done least once a year. Suction of powder snow and aerosols cannot be discounted in unfavourable conditions.

EXAMPLE, DESCRIPTIVE TEXT

ABC-CDF by ABC Ventilationsprodukter AB. Dimension 160, manufactured in abc Garantiplåt in corrosivity class C4.


MEASUREMENTS/SIZE

Size ABC-CDS	B mm	H mm	C mm	D mm	CC mm
125	400	200	25	70	190
160	500	250	25	70	262

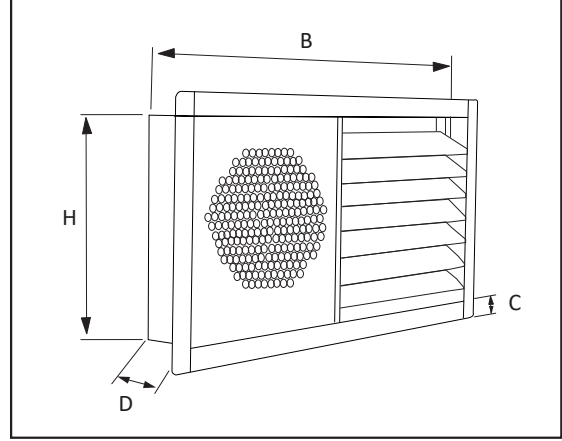


DIMENSIONS

CDS AIR INTAKE

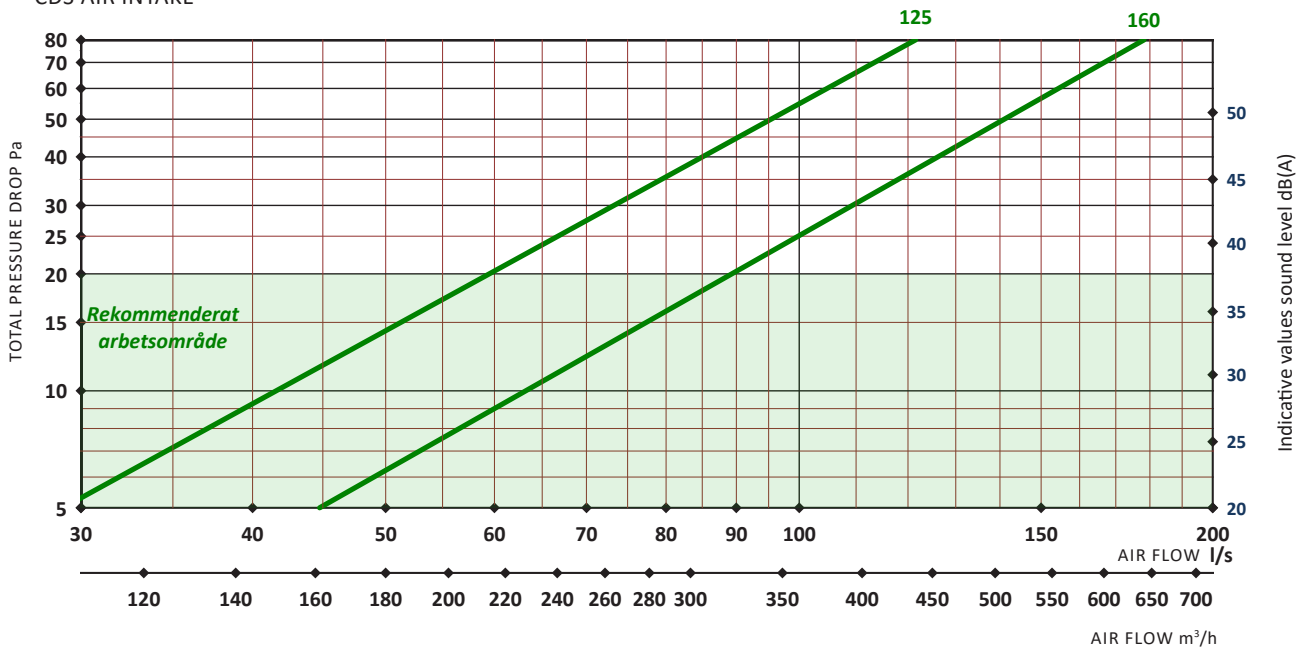

CDS EXHAUST AIR

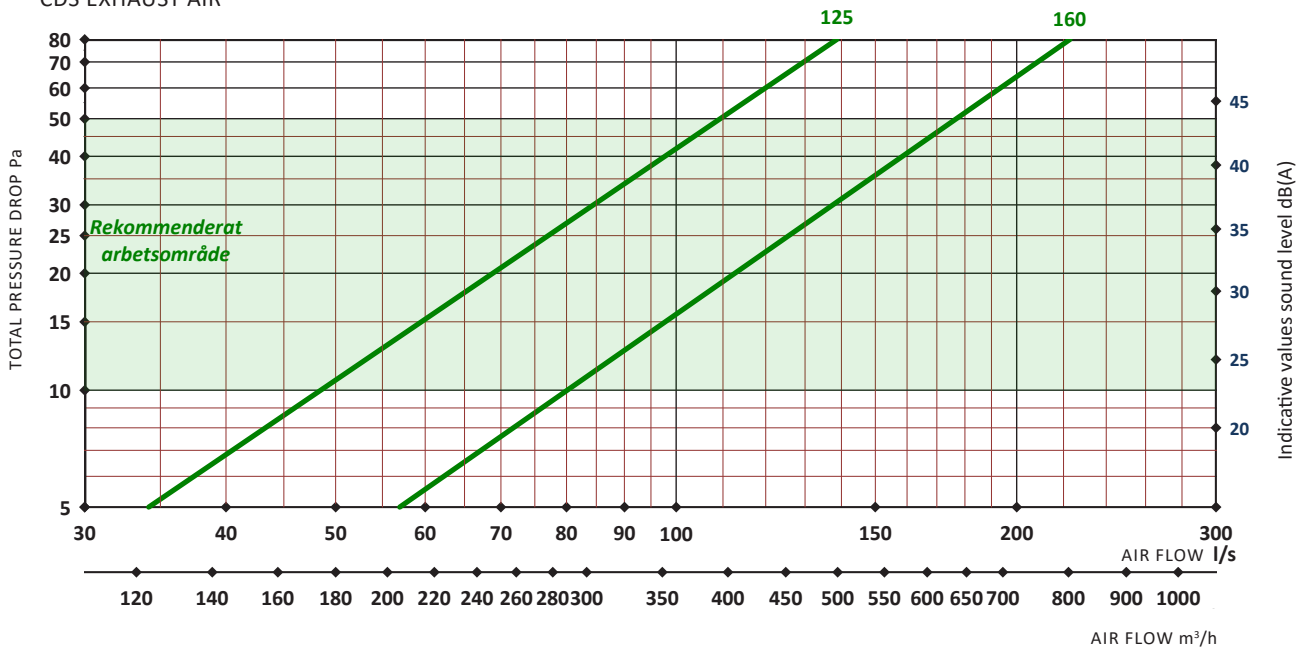







Installation instructions:

Applies to ABC-CDF, CDi, CDR, CDK, CDS

1. Make the necessary openings in the wall and pull out the ventilation ducts for exhaust air and fresh air so that the ducts finish edge to edge with the wall surface. The ducts are isolated all the way to the wall surface. Seal the openings in the wall.

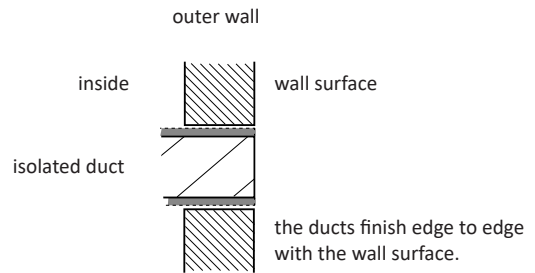2. The wall hood has rubber lining spiro connections. Connect the wall hood to the fresh air and exhaust air duct. Attach the hood to the wall in a appropriately way. Seal properly.

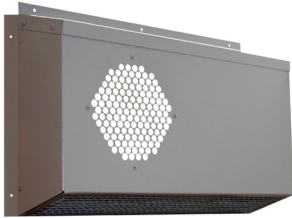

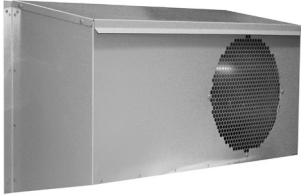Screw holes on the side/top	Screw holes on the side	Attaches to frame
 <p>ABC-CDF</p>	 <p>ABC-CDR</p>	 <p>ABC-CDS</p>
 <p>ABC-CDi</p>	 <p>ABC-CDK</p>	

Environmental product declaration

For exact content of the product, see the current Building product declaration on www.abcvent.se

